

Specifications: (typical @25° C)

Output Frequency Range:	20-20kHz
Output Level:	60 W/ch 8ohms 60 W/ch 4 ohms (With 120VAC or 240VAC input)
Turn on delay:	< 500msec
Turn off delay:	~ 30-100 seconds
THD:	< .1% @ 1kHz
Power Consumption:	< 35 W (no input)
Operating Temperature:	-10°C to +60°C
AC fuse:	10A Slo-blo 5x20mm

Specifications subject to change without notice.

CHANNEL VISION Limited Warranty

Channel Vision Technology will repair or replace any defect in material or workmanship which occurs during normal use of this product with new or rebuilt parts, free of charge in the USA, for two years from the date of original purchase. This is a no hassle warranty with no mail in warranty card needed. This warranty does not cover damages in shipment, failures caused by other products not supplied by Channel Vision Technology, or failures due to accident, misuse, abuse, or alteration of the equipment. This warranty is extended only to the original purchaser, and a purchase receipt, invoice, or other proof of original purchase date will be required before warranty repairs are provided.


Mail in service can be obtained during the warranty period by calling (800) 840-0288 toll free. A Return Authorization number must be obtained in advance and can be marked on the outside of the shipping carton.

This warranty gives you specific legal rights and you may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period, please contact Channel Vision Technology, your dealer or any factory-authorized service center.

500-009 rev A

A1260 / A1260R


12 channel audio amplifier



CHANNEL VISION™

234 Fischer Avenue · Costa Mesa, CA 92626
(714) 424-6500 · (800) 840-0288 · (714) 424-6510 fax
www.channelvision.com · email: sales @ channelvision.com

Rear Panel

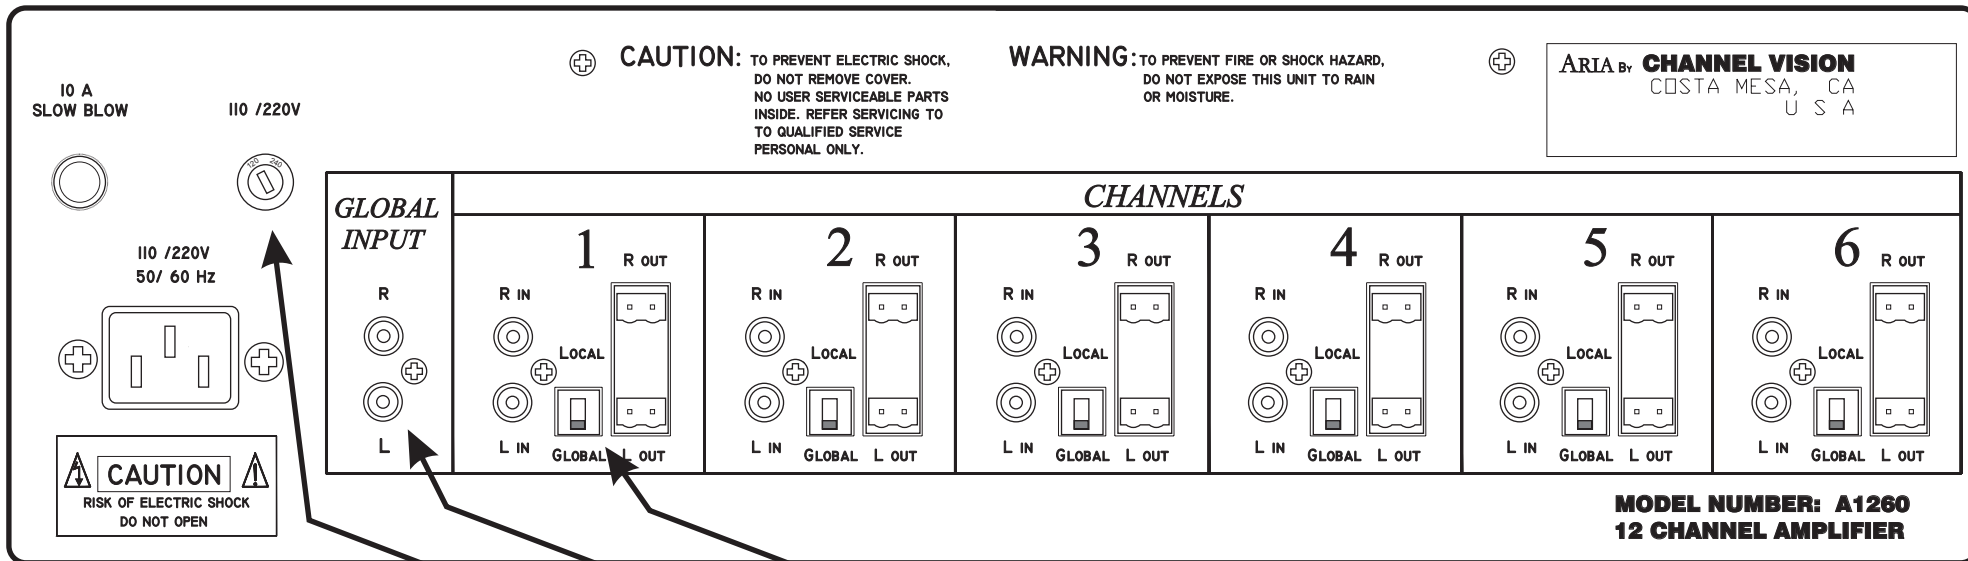

A1260



The A1260 is a 12 channel audio amplifier designed for whole-house audio systems. The amplifier is organized into 6 stereo pairs. Each pair may be driven with a system wide signal, or its own input.

Each of the 12 channels will turn on automatically at the presence of an audio signal and will turn off when the audio signal is gone. Unlike other, zone-by-zone power sensors, this allows up to 12 independent monaural channels.

The A1260 is available in a rack mount version, A1260R.

The A1260 is intended to be constantly on. Power consumption during times of no audio is less than 30 watts.

- Each zone may be switched between the global input and the local input.
- Sources connected to Global input can be heard in all 6 zones.
- 110-120 or 220-240 operation
- Each channel has independent turn-on sensors.
- Torroidal power transformer with 4 secondaries to maximize separation.
- Computer-grade components throughout to ensure long-life.
- Turn on time <500msec Turn off time ~ 30-100 seconds
- Ideal companion to A4600 Matrix A/V controller

A1260R

